

Features

- With 2.5X7.0mm outline size, this surface mounting type tact switch is ideal for high density mounting.
- This is a horizontal type which operates at a horizontal angle to the P.C.B
- Available for tape and reel package

Application

- For use operating all types of portable electronic equipment, in particular compact versions which require high density mounting such as cellular phones and radio communication, etc


Typical Specifications

1. Ratings : DC 12V 50mA
2. Circuit : 1C-1P
3. Travel : 0.25mm
4. Operating Force : 130,180,250gf
5. Contact Resistance : 100m Ω Max.
6. Operating Life : 50,000 Cycles

MATERIAL LIST

PART	MATERIAL
TERMINAL	BRASS
CASE	NYLON 46
CONTACT	STAINLESS STEEL
STEM	NYLON 46
COVER	STAINLESS STEEL

OUTLINE DRAWING

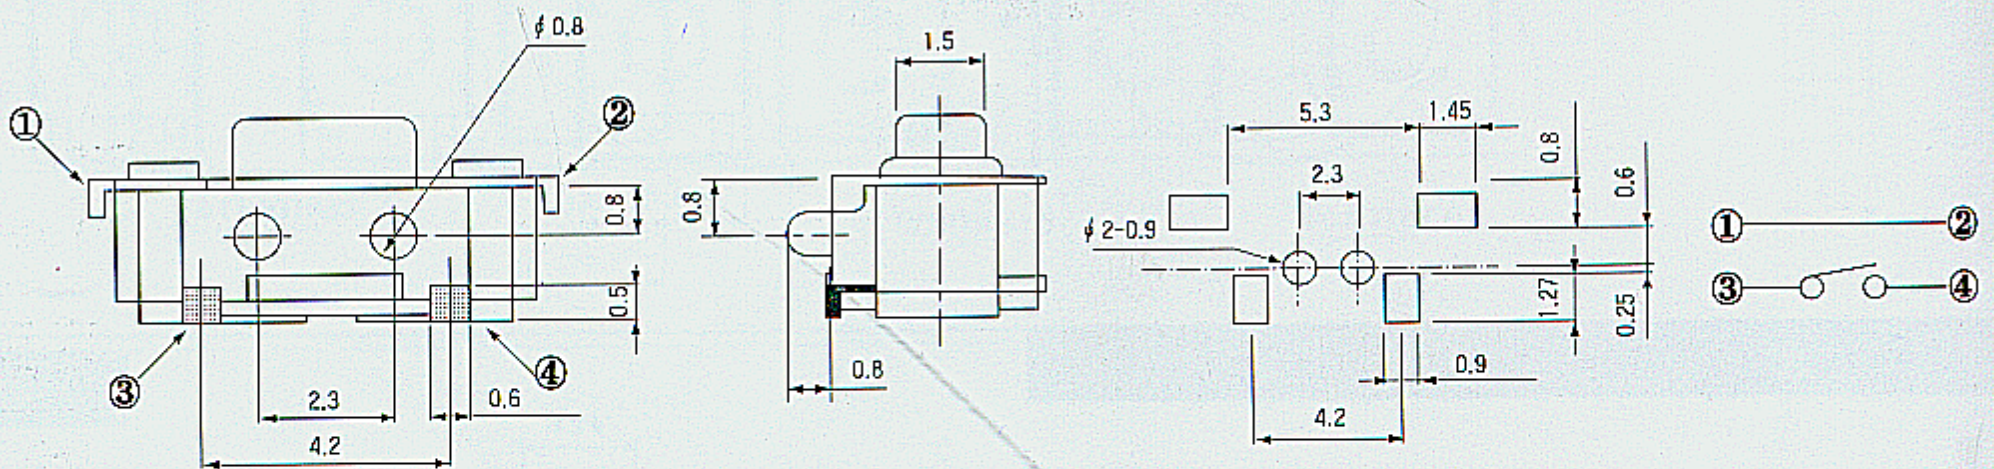

Carrier Taping Dimension

