


Specifications:


- 1.Rating:2.5A 250VAC
- 2.Operating Travel:3m/m
- 3.Actuating Force:120~250g
- 4.Mechanical Life:1,000,000 Cycles(min.)
- 5.Safety Approval: **CE** **D** **N** **S** **PA** **3**

E246644

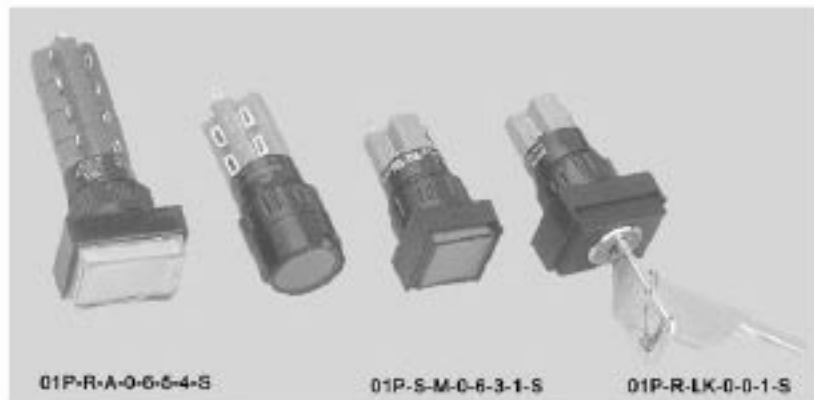


Electric circuit

Momentary




(+, - for multi-LED)

Alternative



(+, - for multi-LED)

Panel mounting

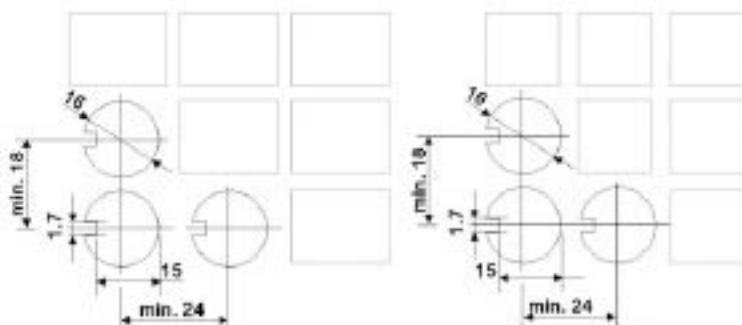

Unit in mm

HOW TO ORDER

01P

Apparent Shapes

C Round	
S Square	
R Rectangular	

IP Protective Grade

0	Standard
1	Rubber-Sealed

Lenses Color

0	White	白
1	Red	紅
2	Yellow	黃
3	Green	綠
4	Blue	藍
5	Orange	橘

Terminal Type

S	Soldering
Q	Plug-in

Function Code

I	Indicator
M	Momentary
A	Alternative

Lamps

0	W/O Lamp
1	AC 110V
2	AC 220V
3	DC Incandescent
4	DC LED 6V
5	DC LED 120V
6	DC LED 24V

Contact Type

1	1P 1A1B
2	2P 2A2B
3	3P 3A3B
4	4P 4A4B

Terminals Arrangement

- 1,2:Normally Closed
3,4:Normally Open
+,-:Lamp Terminal

