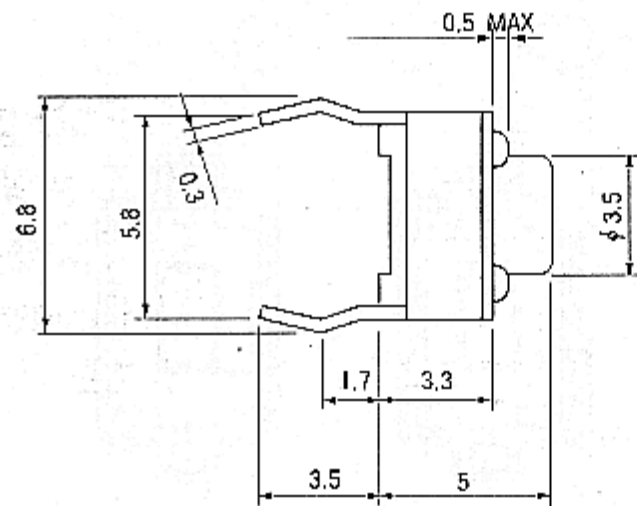


1. Rating: DC12V 50mA
2. Travel: 0.25 ± 0.1 mm
3. Operating Force: 100, 130, 160, 250 ± 30 gf
4. Contact Resistance: 100m Ω Max.
5. Life: 100,000 Cycles Min