
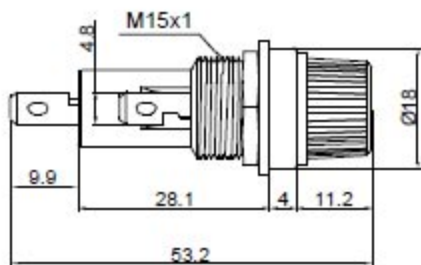


FH1-13

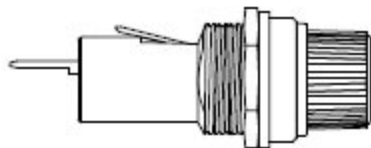

Fuse holder for overload protection

Screw-in mounting

Rating: 10A 250VAC (UL,CUL)



Fuse: Ø6.0x30mm

Cap:Screw type

Panel thickness:4.5mm max



Operating Temperature:-10 °C~+70 °C

MATERIAL:

Housing:PBT,UL rated 94V0

Bayonet:PBT,UL rated 94V0

Terminal:Brass,silver or tin plated

Nut:Brass,Ni plated

CUT-OUT

