
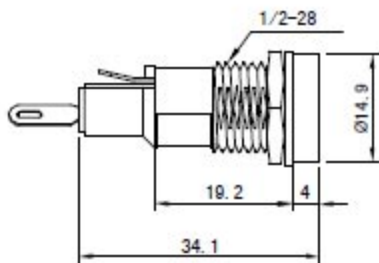


FH1



**MATERIAL:**

Housing:PBT,UL rated 94V2 min  
Bayonet:PBT,UL rated 94V2 min  
Terminal:Brass,silver or tin plated  
Nut:Brass,Ni plated

Fuse holder for overload protection

Screw-in mounting

Rating: 10A 250VAC (UL,CUL)

Fuse:  $\varnothing 5.0 \times 20 \text{mm}$  

Cap:Bayonet type

Panel thickness:4.5mm max



Operating Temperature:-10 °C~+70 °C



E240853



CUT-OUT

