



FH201-9

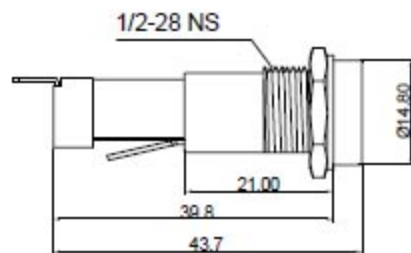

MATERIAL:

Housing: PBT, UL rated 94V2 min
 Bayonet: PBT, UL rated 94V2 min
 Terminal: Brass, silver or tin plated
 Nut: Brass, Ni plated

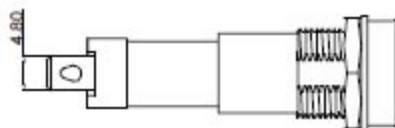

Fuse holder for overload protection

Screw-in mounting

Rating: 15A 250VAC (UL, CUL)

Fuse: Ø6.0x30mm

Cap: Bayonet type

Panel thickness: 4.5mm max

Operating Temperature: -10 °C ~ +70 °C



CUT-OUT

