


FH201

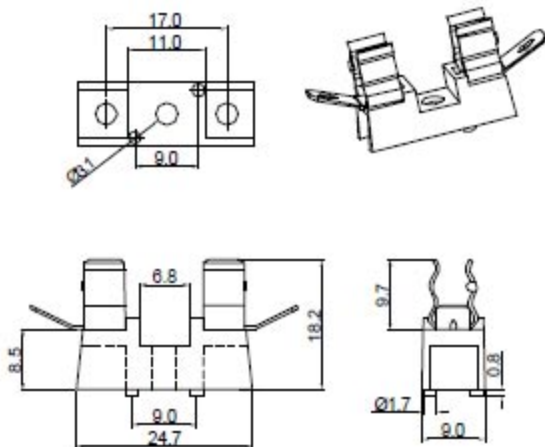

Fuse holder for overload protection

Rating: 15A 250VAC (UL,CUL)

Fuse: Ø5.0x20mm



Operating Temperature: -10 °C ~ +70 °C

Dielectric Strength: 1000VAC 1 minute

 E240853



MATERIAL:

Housing: PBT, UL rated 94V0

Terminal: Phosphor bronze, silver or tin plated