
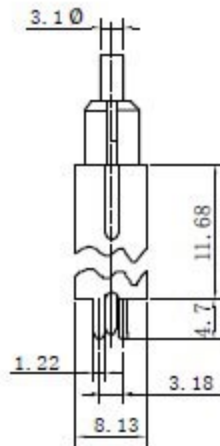


P8701-S20

FEATURES:

CONTACT RATING: 1A @ 120 VAC or 28 VDC
 ELECTRICAL LIFE: 50,000 make-and-break cycles at full load
 CONTACT RESISTANCE: 20mΩ max. initial @ 2-4VDC, 100mA
 INSULATION RESISTANCE: 1,000MΩ min.
 DIELECTRIC STRENGTH: 1,000V RMS @ sea level.
 OPERATING TEMPERATURE: -30° C to 85° C

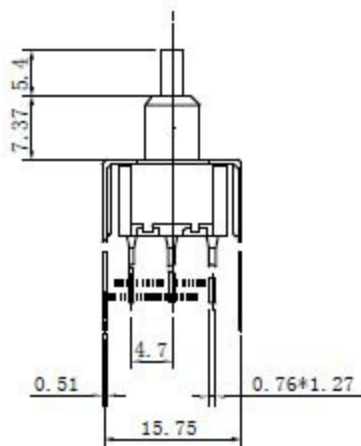

P.C. MOUNTING

