


PB01-M



OFF

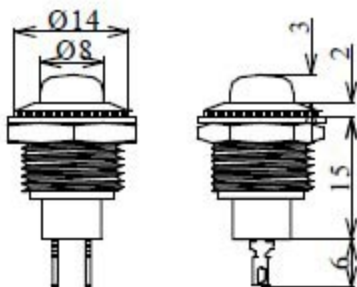

ON

FEATURES:

- MATERIAL :FRAMES ARE NYLON(UL Flame:94V-2).
- TERMINALS ARE SILVER PLATED COPPER

RATING:

3A 125V AC


1.5A 250V AC

Contact resistance: 50mΩ Max

Insulation resistance:DC 500v 100MΩ Min

Dielectric strength:AC 1000v 1minute

CUT-OUT



3mm max