


PB01-P

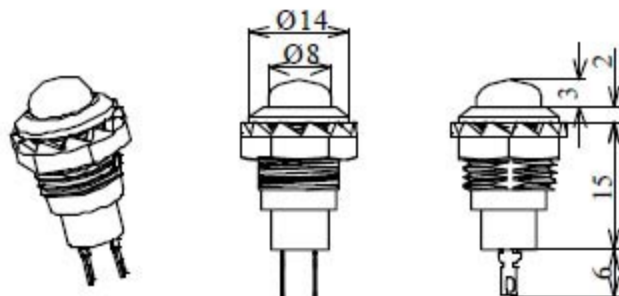

RATING:

3A 125V AC


1.5A 250V AC

Contact resistance: 50m Ω Max

Insulation resistance: DC 500v 100M Ω Min

Dielectric strength: AC 1000v 1minute

CUT-OUT



3mm max

FEATURES:

MATERIAL :FRAMES ARE NYLON(UL Flame:94V-2).

TERMINALS ARE SILVER PLATED COPPER



OFF



ON