

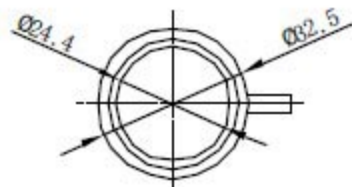
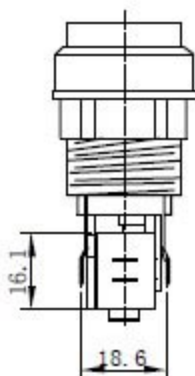


PBS 小圆按钮

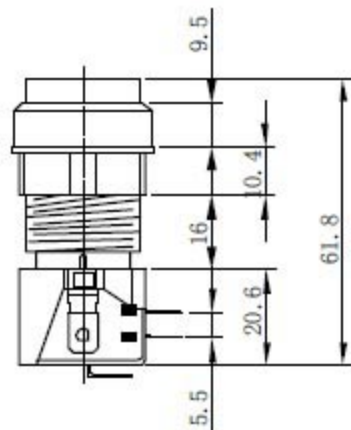

MOUNTING HOLE



Specifications:

Cat#PBS-11, 12, 14&16 Rating: 1A 250VAC (TUV), 3A 125VAC
0.3A 50VDC

Cat#PBS-13B/C Rating: 4A 250VAC (TUV), 8A 125VAC

Contact Resistance: 20m Ω max. (initial)

Insulation Resistance: 500VDC 100M Ω min.

Dielectric voltage withstand: 1000VAC for 1 minute

Operation force: 600 $\pm$ 200 gram

Life cycle: 6,000 cycles

Temperature Rang: 0 $^{\circ}$ to +85 $^{\circ}$ C

Base: PC

Actuator: POM, optional color

Cover: PC

Contact: Silver

Terminal: brass

Washer: steel

Nut: Steel

Switching function: on-off, off-momentary on, or on-momentary off