
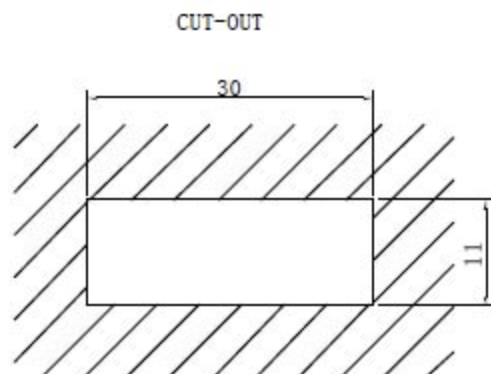
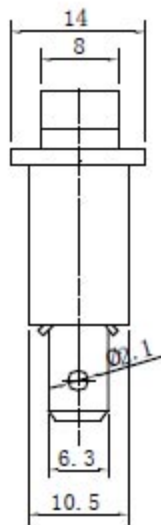


R-1-110-C5N-BB

Specifications:

1. RATING: 16A @ 125VAC /250VAC
16(4)A 250VAC T85 μ (1E4)
2. CONTACT RESISTANCE: 20m Ω max.
3. INSULATION RESISTANCE: DC 500V 100M Ω min.
4. DIELECTRIC STRENGTH: 1,500VAC/1 Minute

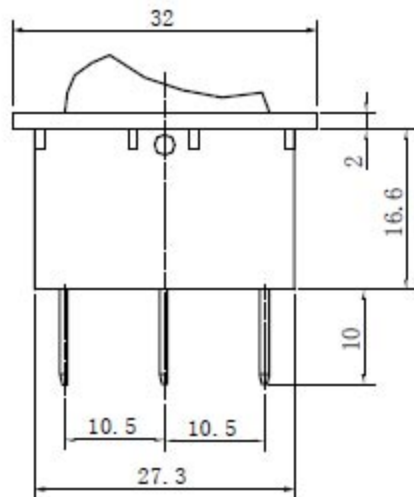

C  US