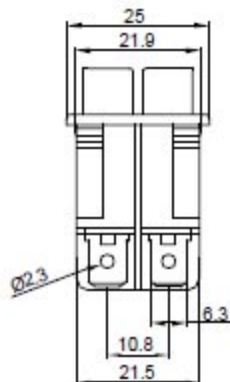




R

**MATERIAL:**

Body:Nylon66,UL rated:94V-2 min

Actuator:Nylon66,UL rated:94V-2 min

Terminal:Brass,silver or tin plated

Rating: 16A 125V AC (UL CUL )

16A 250V AC (UL CUL VDE CE CB CQC)

Contact Resistance: 20m Ω (Max)


Insulation Resistance: DC 500V 100M Ω (Min)

Dielectric Strength: AC1500V 1 minute


Electrical life: 10,000 cycles

Operating Temperature: 0 °C~85 °C

Safety Approval: RoHS

**CUT-OUT**

	X	Y
0.75~1.25	30.0+0.1	22.0+0.1
1.25~2.00	30.2+0.1	22.0+0.1
2.00~3.00	30.4+0.1	22.0+0.1

**SWITCHING CIRCUIT**

Marking	x	0	1	2	3	4	5
	標	None	•	ON OFF	—	—	—