

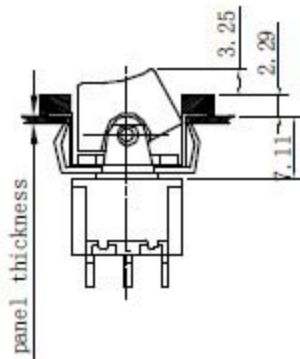


R12



PANEL MOUNTING



FEATURES:

CONTACT RATING: 6A @ 120 VAC or 28 VDC (q terminal)

ELECTRICAL LIFE: 60,000 make-and-break cycles at full load

CONTACT RESISTANCE: 10m Ω max. initial @ 2-4 VDC, 100mA

INSULATION RESISTANCE: 1,000M Ω min.

DIELECTRIC STRENGTH: 1,600V RMS @ sea level.

OPERATING TEMPERATURE: -30 ° C to 85 ° C