RS-4

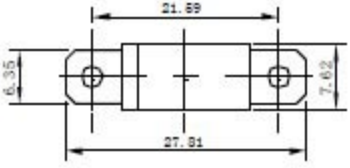

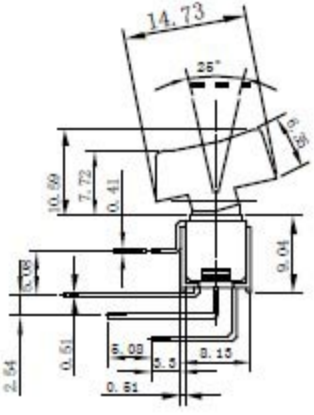

FEATURES:

CONTACT RATING:5A @ 120 VAC or 28 VDC(Q:terminal option)
ELECTRICAL LIFE:50,000 make-and-break cycles at full load
CONTACT RESISTANCE:20m Ω max.initial @ 2-4 VDC,100mA
INSULATION RESISTANCE:1,000M Ω min.
DIELECTRIC STRENGTH:1,500V RMS @ sea level.
OPERATING TEMPERTURE:-50 ° C to 85 ° C



P.C.B. MOUNTING DIMENSION





C US