
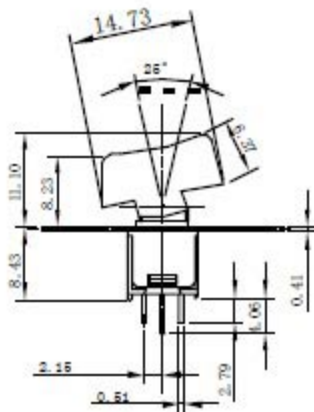


RS-5

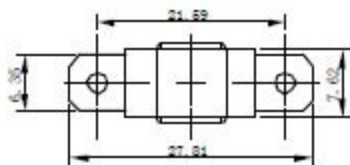

FEATURES:

CONTACT RATING: 5A @ 120 VAC or 20 VDC (Q: terminal option)
 ELECTRICAL LIFE: 50,000 make-and-break cycles at full load
 CONTACT RESISTANCE: 20m Ω max. initial @ 2-4 VDC, 100mA
 INSULATION RESISTANCE: 1,000M Ω min.
 DIELECTRIC STRENGTH: 1,500V RMS @ sea level.
 OPERATING TEMPERATURE: -50 ° C to 85 ° C

P. C. B. MOUNTING DIMENSION

