
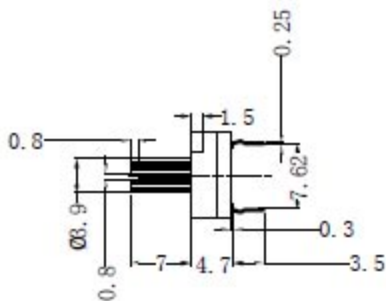




RS407

ELECTRICAL:

Operating voltage: 24VDC maximum
Switching current: 100mA maximum
Carrying current: 0.5A maximum
Contact resistance: 100M Ω maximum
Insulation resistance: 1,000M Ω maximum
Dielectric strength: 500VAC for 1 minute



CUT-OUT



Recommended P.C.B.
Drilling Size