




Rating: 10A 250V AC (UL CUL)
 10A 250V AC (VDE)
 10A 250V AC (CCC)



Insulation Resistance: DC 500V 100M Ω Min

Dielectric Strength: AC2000V 1 minute




Fuse: $\varnothing 5.0 \times 20 \text{ mm}$



MATERIAL:

Body: PBT

Terminal: Brass, silver or tin plated

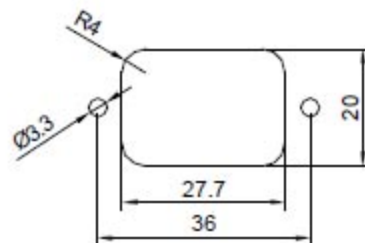

CUT-OUT