
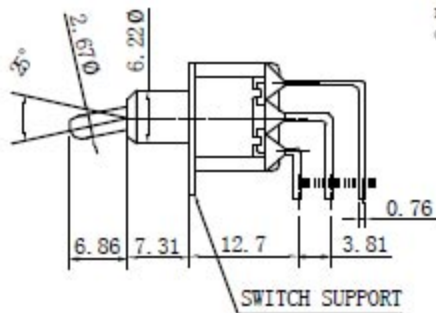





T8021L

FEATURES:

CONTACT RATING: 5A @ 120 VAC or 28 VDC (Q contact)
 ELECTRICAL LIFE: 60,000 make-and-break cycles at full load
 CONTACT RESISTANCE: 10m Ω max. initial @ 2-VDC, 100mA
 INSULATION RESISTANCE: 1,000M Ω min.
 DIELECTRIC STRENGTH: 1,500V RMS @ sea level.
 OPERATING TEMPERATURE: -30 ° C to 85 ° C



P. C. B MOUNTING DIMENSIONS



C  US