


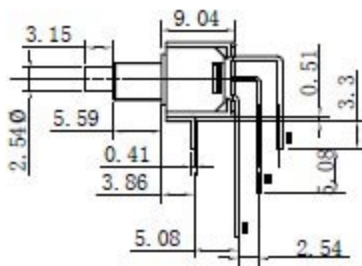


TS-22B



P.C.B MOUNTING DIMENSION



FEATURES:

CONTACT RATING: 1A @ 120 VAC or 28 VDC
 ELECTRICAL LIFE: 50,000 make-and-break cycles at full load
 CONTACT RESISTANCE: 20m Ω max initial @ 2-VDC, 100mA
 INSULATION RESISTANCE: 1,000M Ω min.
 DIELECTRIC STRENGTH: 1,500V RMS @ sea level.
 OPERATING TEMPERATURE: -50 °C to 86 °C

SCHEMATIC

