
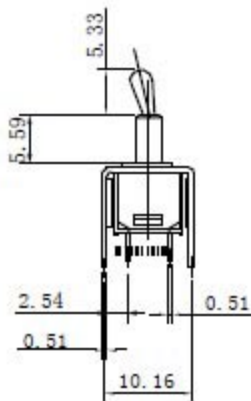


TS-21-A5



FEATURES:

CONTACT RATING: 5A @ 120 VAC or 28 VDC (Q Contact)
 ELECTRICAL LIFE: 50,000 make-and-break cycles at full load
 CONTACT RESISTANCE: 20m Ω max. initial @ 2-VDC, 100mA
 INSULATION RESISTANCE: 1,000M Ω min.
 DIELECTRIC STRENGTH: 1,600V RMS @ sea level.
 OPERATING TEMPERATURE: -30 ° C to 88 ° C

P. C. MOUNTING

