

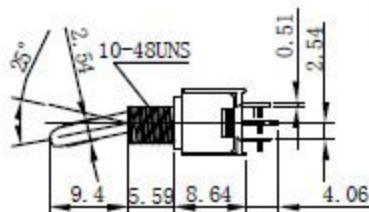



TS-5



CALUS

FEATURES:

CONTACT RATING: 5A @ 120 VAC or 25 VDC (Q contact)

ELECTRICAL LIFE: 50,000 make-and-break cycles at full load

CONTACT RESISTANCE: 20m Ω max initial @ 2-8VDC, 100mA

INSULATION RESISTANCE: 1,000M Ω min.

DIELECTRIC STRENGTH: 1,600V RMS @ sea level.

OPERATING TEMPERATURE: -50 °C to 85 °C