

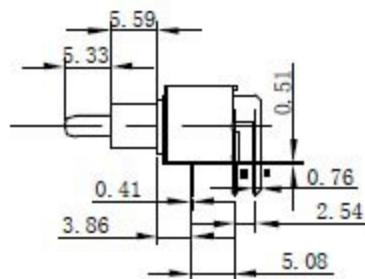



TS-7



P.C.B
MOUNTING DIMENSION

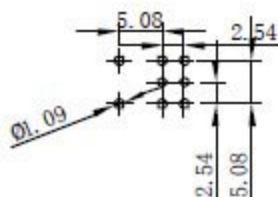

FEATURES:

CONTACT RATING: 5A @ 120 VAC or 28 VDC (Q contact)
 ELECTRICAL LIFE: 50,000 make-and-break cycles at full load
 CONTACT RESISTANCE: 20m Ω max. initial @ 2-(VDC, 100mA)
 INSULATION RESISTANCE: 1,000M Ω min.
 DIELECTRIC STRENGTH: 1,500V RMS @ sea level.
 OPERATING TEMPERATURE: -30 °C to 85 °C



CALUS