


TS2

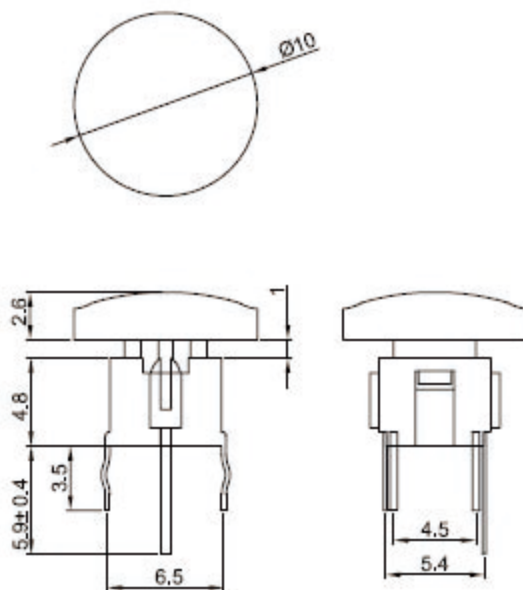


MATERIAL:

Frame:Nylon66,UL rated;94V-2 min
Cap:Nylon66,UL rated;94V-2 min
Terminal:Brass,silver or tin plated


Specifications

Circuit :SPST
Current rating :50mA
Voltage rating :12VDC
Dielectric withstanding voltage:250VAC for 1 minute
Contact resistance :100m Ω Max.(initial)
Insulation resistance :100M Ω Min
Operating force :250 $\pm$ 50gf
:180 $\pm$ 50gf
Total travel :0.25mm $\pm$ 0.1mm
Operating life :100,000 CYCLES Min
Solder specifications :256 $^{\circ}$ C for 5 seconds
Function :Momentary
Operating temperature :+10 $^{\circ}$ C ~ +60 $^{\circ}$ C

P.C.B.LAYOUT



CIRCUIT



修正 REVISION	说明 DESCRIPTION	核准 APPROVAL BY	公差 TOLERANCES	X $\pm$ 0.3	.XX $\pm$ 0.15	角度 ANGLE 1 $^{\circ}$	单位	DIMENSION UNIT	mm.
			绘图 DRAWN BY	Gokey Guo	设计 DESIGNED BY	Gokey Guo	比例尺 SCALE	NONE	品名 TITLE
			核对 CHECKED BY	Xinchao Le	核准 APPROVED BY	Xinchao Le	日期 DATE	2008.05.08	图号 DRAWING NO
									材质 MATERIAL
									处理 FINISH

TS2-00-5WU