


VM5-00N

Specifications:

10A 125VAC 10A 250(UL)
 CONTACT RESISTANCE :20m Ω max.(initial)
 INSULATION RESISTANCE:500VDC 100M Ω min.
 DIELECTRIC STRENGTH:1000VAC for 1minute
 INSULATION RESISTANCE:100M Ω min.(at 500VDC)
 MECHANICAL life cycle:5,000,000
 Loaded life cycle:100,000
 TEMPERATURE RANGE:0 ° to +65 ° C
 Case:PET
 Actuator:Stainless steel
 Button:PCB
 Spring:High carbon steel wire(S.W.F)
 Contact:Silver alloy
 Operating speed:0.1mm/sec to 1mm/sec
 Mechanical operating frequency:300 to 400/min
 Electrical operating frequency:10 to 30/min

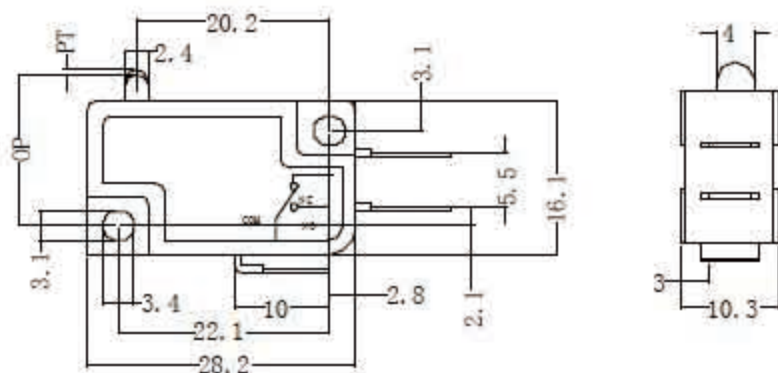

CUT-OUT

9.50 ± 0.10

(mounting hole pitch)

