



VM5-02N

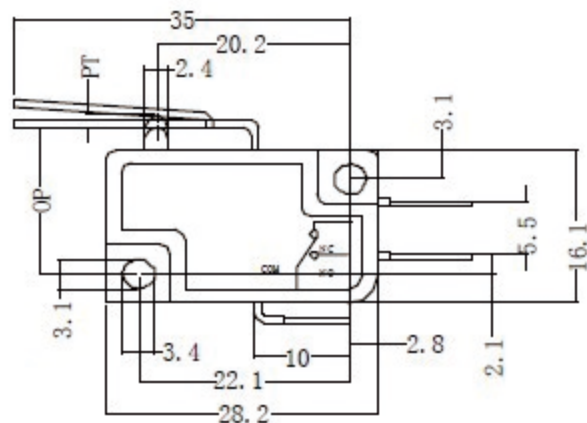

Specifications:

10A 125VAC, 10A 250 (UL)
CONTACT RESISTANCE :20mO max. (inital)
INSULATION RESISTANCE:500VDC 100MO min.
DIELECTRIC STRENGTH:1000VAC for 1minute
INSULATION RESISTANCE:100MO min. (at 500VDC)
MECHANICAL life cycle:5, 000, 000
Loaded life cycle:100, 000
TEMPERATURE RANG:0° to +85° C
Case:PBT
Actuator:Stainless stell
Button:POM
Spring:High carbon steel wire(S.W.P)
Contact:Silver alloy
Operating speed:0.1mm/sec to 1mm/sec
Mechanical operating frequency:300 to 400/min
Electrical operating frequency:10 to 30/min

CUT-OUT

