



VM5-04N

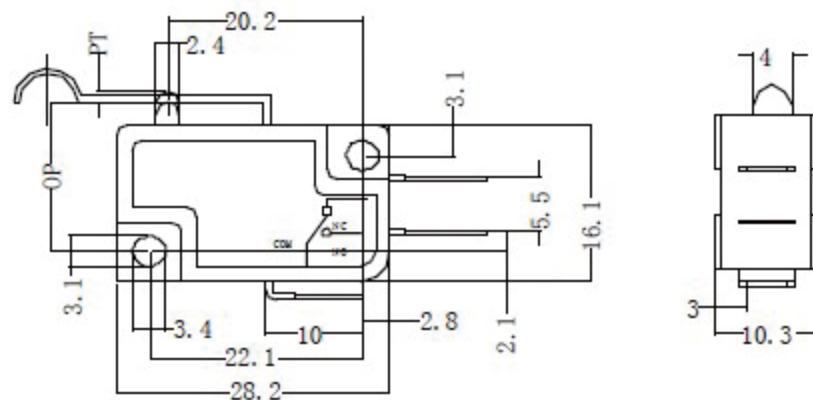

CUT-OUT

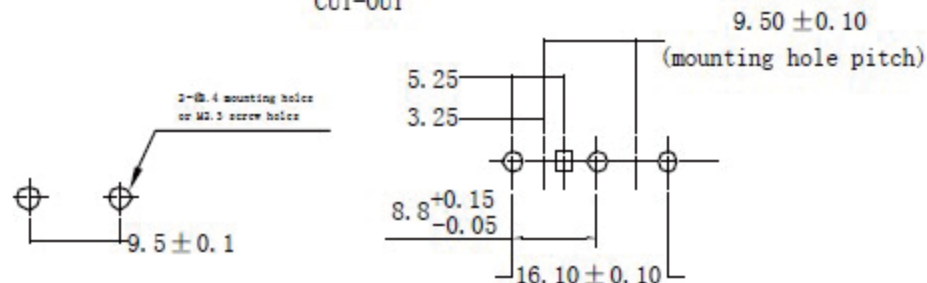

Specifications:

10A 125VAC, 10A 250(UL)

CONTACT RESISTANCE :20mΩ max. (initial)

INSULATION RESISTANCE:500VDC 100MΩ min.

DIELECTRIC STRENGTH:1000VAC for 1minute

INSULATION RESISTANCE:100MΩ min. (at 500VDC)

MECHANICAL life cycle:5,000,000

Loaded life cycle:100,000

TEMPERATURE RANG:0° to +85° C

Case:PBT

Actuator:Stainless steel

Button:POM

Spring:High carbon steel wire(S.W.P)

Contact:Silver alloy

Operating speed:0.1mm/sec to 1mm/sec

Mechanical operating frequency:300 to 400/min

Electrical operating frequency:10 to 30/min

