
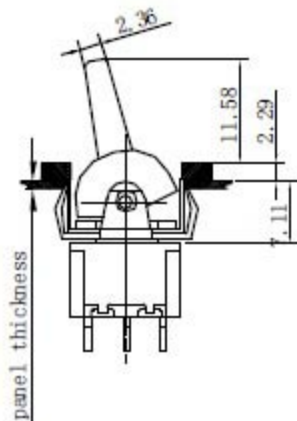



P14



FEATURES:

CONTACT RATING: 5A @ 120 VAC or 28 VDC (Q terminal)
 ELECTRICAL LIFE: 50,000 make-and-break cycles at full load
 CONTACT RESISTANCE: 10mΩ max. initial @ 2-4 VDC, 100mA
 INSULATION RESISTANCE: 1,000MΩ min.
 DIELECTRIC STRENGTH: 1,500V RMS @ sea level.
 OPERATING TEMPERATURE: -30° C to 85° C

PANEL MOUNTING



CALUS