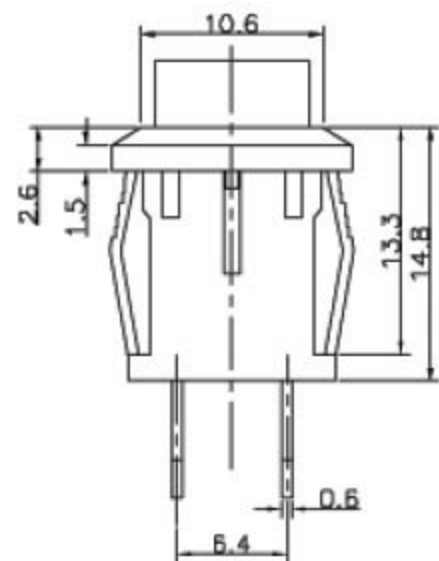
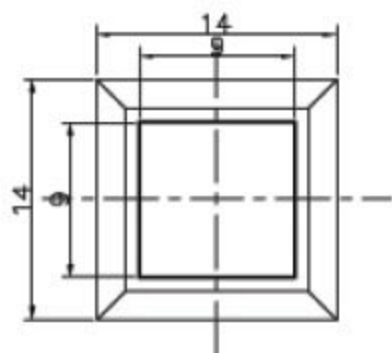


SPECIFICATION:


1.RATING: 1A 125VAC

2.Contact resistance :20m Ω Max

3.Insulation resistance :100 M Ω Min at 500VDC

4.dielectric strength :1000VAC for 1 minute

5.OFF (ON)=PUSH ON



MOUNTING HOLE

