
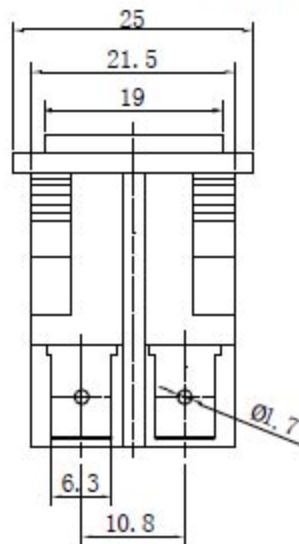



R210-C5N-BB

Specifications:

1. RATING: 10A @ 120VAC / 6A 250VAC (UL CSA)
6A 250VAC T85 μ (VDE)
2. CONTACT RESISTANCE: 20m Ω max.
3. INSULATION RESISTANCE: DC 500V 100MO min.
4. DIELECTRIC STRENGTH: 1,500VAC/1 Minute

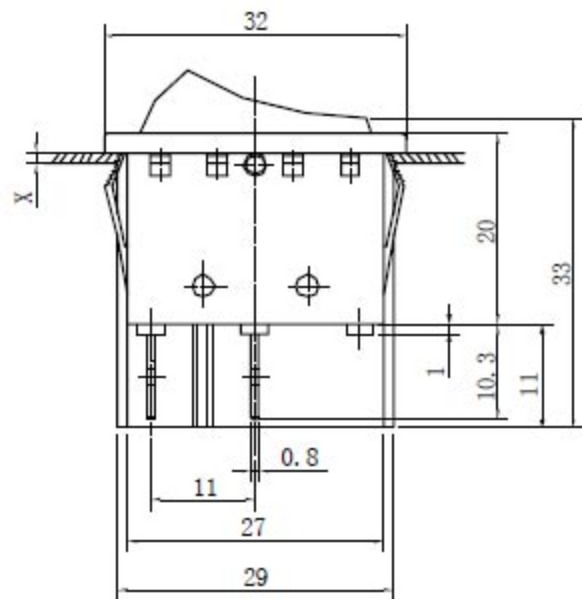

CUT-OUT



W	Panel Thickness
28.0	0.75-1.25
28.2	1.25-2.0
28.5	2.0-3.0

