


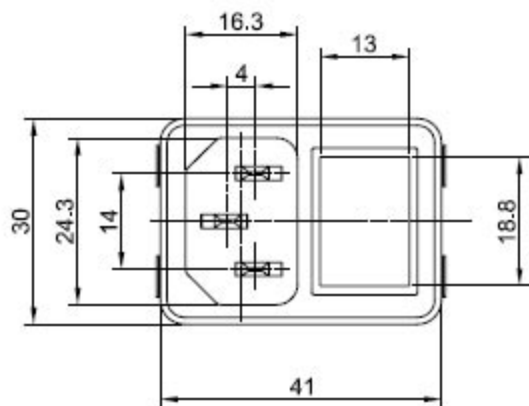

Rating: 15A 250VAC 10A 250VAC

Dielectric Strength: 2000VAC/1 Minute

Insulation Resistance: DC 500V 100M Ω (min)




Safety Approval:



MATERIAL:

Housing: PA66, UL rated 94V1 min

Terminal: Brass, silver or tin plate

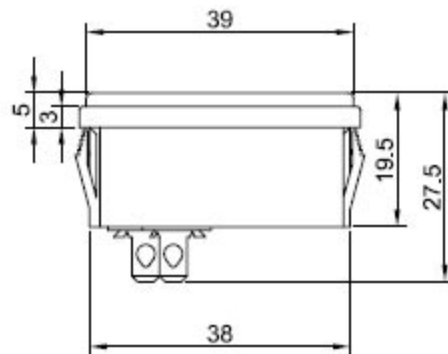

CUT-OUT